

09/806082  
US

EXPRESS MAIL LABEL NO.: EL 640 011 949 US

JC10 Rec'd PCT/PTO 23 MAR 2001

TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US)

CONCERNING A FILING UNDER 35 U.S.C. 371

ATTORNEY'S DOCKET NUMBER: Kanebo Case 5

U.S. APPLICATION NO.

(If known, see 37 CFR 1.5): Unknown

INTERNATIONAL APPLICATION NO.: PCT/JP99/05434 INTERNATIONAL FILING DATE: September 30, 1999

PRIORITY DATE CLAIMED: September 30, 1998

TITLE OF INVENTION: POLISHING TAPE USED IN PRODUCTION OF MAGNETIC RECORDING MEDIUM

APPLICANTS FOR DO/EO/US: (1) Akira EBIHARA, (2) Shoichiro NOGUCHI and (3) Keiji NAKANISHI

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This express request to begin national examination procedures (35 U.S.C. 371(f) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☒ A proper Demand for International Preliminary Examination was made by the 19<sup>th</sup> month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
  - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☒ has been transmitted by the International Bureau.
  - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)).
  - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☐ have been transmitted by the International Bureau.
  - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
  - d. ☐ have not been made and will not be made.
8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).
10. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).

**\*Items 11. to 16. below concern document(s) or information included:**

11. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☐ A **FIRST** preliminary amendment.  
☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
14. ☐ A substitute specification.
15. ☐ A change of power of attorney and/or address letter.
16. ☒ Other items or information:
  - Amendment Before First Office Action
  - Formal Drawings (3 sheets)
  - Title Page of WIPO Document WO 00/19419
  - Form PCT/ISA/210 - English Language International Search Report
  - Form PCT/IB/301 - Notification of Receipt of Record Copy
  - Form PCT/IB/304 - Notification Concerning Submission or Transmittal of Priority Document
  - Form PCT/IB/308 - Notice Informing Applicant of Communication of International Application to Designated Offices
  - Form PCT/IB/332 - Information Concerning Elected Offices Notified of Their Election
  - Postal Card

FORM PTO-1390  
U.S. APPLICATION NO.  
(if known, see 37 CFR 1.5):  
Unknown

INTERNATIONAL APPLICATION NO.:  
PCT/JP99/05434

JC10 Rec'd PCT/PTO 2 3 MAR 2001

US  
ATTORNEY'S DOCKET NUMBER:  
Kanebo Case 09/806082

17. [X] The following fees are submitted:

CALCULATIONS PTO USE ONLY

**BASIC NATIONAL FEE (37 CFR 1.492(a)(1)-(5)):**

Neither international preliminary examination fee (37 CFR 1.482)  
nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO  
and International Search Report not prepared by the EPO or JPO .... \$1000.00  
International preliminary examination fee (37 CFR 1.482) not  
paid to USPTO but International Search Report prepared by  
the EPO or JPO ..... \$ 860.00  
International preliminary examination fee (37 CFR 1.482) not  
paid to USPTO but international search fee (37 CFR 1.445(a)(2))  
paid to USPTO ..... \$ 710.00  
International preliminary examination fee paid to USPTO (37  
CFR 1.482) but all claims did not satisfy provisions of PCT  
Article 33(1)-(4) ..... \$ 670.00  
International preliminary examination fee paid to USPTO (37 CFR  
1.482) and all claims satisfied provisions of PCT Article 33(1)-(4) ... \$ 100.00

ENTER APPROPRIATE BASIC FEE AMOUNT = \$860.00

Surcharge of \$130.00 for furnishing the oath or declaration later than ☐ 20 ☐ 30  
months from the earliest claimed priority date (37 CFR 1.492(e)). \$

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE	
Total claims	3 - 20 =	0	X \$ 18.00	\$
Ind. claims	3 - 3 =	0	X \$ 80.00	\$
MULTIPLE DEPENDENT CLAIMS (if applicable)			+ \$270.00	\$
TOTAL OF ABOVE CALCULATIONS			=	\$860.00

Reduction of 1/2 for filing by small entity, if applicable. Small Entity Statement  
must also be filed (Note 37 CFR 1.9, 1.27, 1.28). - \$  
SUBTOTAL = \$860.00

Processing fee of \$130.00 for furnishing the English translation later than ☐ 20 ☐ 30  
months from the earliest claimed priority date (37 CFR 1.492(f)). + \$  
TOTAL NATIONAL FEE = \$860.00


Fee for recording assignment (37 CFR 1.21(h)). The assignment must be accompanied  
by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property + \$  
TOTAL FEES ENCLOSED = \$860.00  
Amount to be refunded \$  
charged \$

- a. [X] A check in the amount of \$860.00 to cover the above fees is enclosed.  
b. [ ] Please charge my Deposit Account No. \_\_\_\_\_ in the amount of \$ \_\_\_\_\_ to cover the above fees. A duplicate  
copy of this sheet is enclosed.  
c. [X] The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to  
Deposit Account No. 06-1382. A duplicate copy of this sheet is enclosed.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a)  
or (b)) must be filed and granted to restore the application to pending status.

IN DUPLICATE

SEND ALL CORRESPONDENCE TO:  
FLYNN, THIEL, BOUTELL & TANIS, P.C.  
2026 Rambling Road  
Kalamazoo, Michigan 49008-1699

  
Terryence F. Chapman  
Registration Number: 32 549

300.0900

09/806082

PATENT APPLICATION

JC10 Rec'd PCT/PTO 23 MAR 2001

Express Mail Label No.: EL 640 011 949 US

IN THE U.S. PATENT AND TRADEMARK OFFICE

March 23, 2001

Applicants: Akira EBIHARA et al

For : POLISHING TAPE USED IN PRODUCTION  
OF MAGNETIC RECORDING MEDIUM

PCT International Application No.: PCT/JP99/05434

PCT International Filing Date: September 30, 1999

U.S. Application No.

(if known, see 37 CFR 1.5): Unknown

Atty. Docket No.: Kanebo Case 5

Box PCT

Assistant Commissioner for Patents

Washington, DC 20231

**AMENDMENT BEFORE FIRST OFFICE ACTION**

Sir:

Prior to issuance of the first Office Action in the  
above-identified application, kindly enter the following:

**IN THE TITLE**

Please change USPTO records to indicate that the title to  
be used in this application is ---POLISHING TAPE USED IN  
PRODUCTION OF MAGNETIC RECORDING MEDIUM--, which title  
coincides with the title appearing in the English translation  
of the specification.

**IN THE SPECIFICATION**

Please amend the first paragraph of "DISCLOSURE OF THE  
INVENTION" on page 5, as indicated on the attached marked-up  
page. A replacement paragraph including the amendments is  
also enclosed.

09/806082-032001

IN THE CLAIMS

Please amend Claim 1 as shown on the attached marked-up page. Pursuant to 37 CFR § 1.121, a clean replacement claim page is also enclosed herewith.

REMARKS

Entry of the foregoing amendments prior to issuance of the first Office Action is respectfully solicited. These amendments are intended to place the application in better form for consideration by the Examiner.

Respectfully submitted,

  
Terryence F. Chapman

TFC/smd

FLYNN, THIEL, BOUTELL	Dale H. Thiel	Reg. No. 24 323
& TANIS, P.C.	David G. Boutell	Reg. No. 25 072
2026 Rambling Road	Ronald J. Tanis	Reg. No. 22 724
Kalamazoo, MI 49008-1699	Terryence F. Chapman	Reg. No. 32 549
Phone: (616) 381-1156	Mark L. Maki	Reg. No. 36 589
Fax: (616) 381-5465	David S. Goldenberg	Reg. No. 31 257
	Sidney B. Williams, Jr.	Reg. No. 24 949
	Liane L. Churney	Reg. No. 40 694
	Brian R. Tumm	Reg. No. 36 328

Encl: Marked-Up Amended Specification Paragraph from Page 5  
Clean/Replacement Amended Specification Paragraph  
from Page 5  
Marked-Up Claim 1 (Amended)  
Clean/Replacement Claim 1 (Amended)  
Postal Card

336.9804

09806082-032001

DISCLOSURE OF THE INVENTION

To attain the aobject described above, the present invention is provided with the following constitution. That is, the invention described in claim 1 is directed to a polishing tape for polishing the surface of a substrate of a magnetic recording medium, said polishing tape being made of a flocked cloth comprising a substrate and a flock material formed on said substrate, said flocked cloth having a tensile strength in a longitudinal direction as measured by the method A defined in JIS L 1096-1990 of not less than 25 kgf/50 mm and a tensile elongation of not more than 5%/5 kg/50 m, characterized in that a single yarn of a dissolution-decomposition type composite fiber consisting of a nylon component and a dissolving component is used as said flock material and a thin-fineness filament obtained by splitting said single yarn is used as a pile, and that said pile is formed in pile height within a range from 0.2 to 1.0 mm and pile density within a range from 100 to 200 g/m<sup>2</sup> and 80% or more of said pile is formed in fineness of less than 0.3 d.

09005082-032001

DISCLOSURE OF THE INVENTION

To attain the object described above, the present invention is provided with the following constitution. That is, the invention described in claim 1 is directed to a polishing tape for polishing the surface of a substrate of a magnetic recording medium, said polishing tape being made of a flocked cloth comprising a substrate and a flock material formed on said substrate, said flocked cloth having a tensile strength in a longitudinal direction as measured by the method A defined in JIS L 1096-1990 of not less than 25 kgf/50 mm and a tensile elongation of not more than 5%/5 kg/50 m, characterized in that a single yarn of a dissolution-decomposition type composite fiber consisting of a nylon component and a dissolving component is used as said flock material and a thin-fineness filament obtained by splitting said single yarn is used as a pile, and that said pile is formed in pile height within a range from 0.2 to 1.0 mm and pile density within a range from 100 to 200 g/m<sup>2</sup> and 80% or more of said pile is formed in fineness of less than 0.3 d.

09806082-082001

March 23, 2001

1. (Amended) A polishing tape for polishing the surface of a substrate of a magnetic recording medium, said polishing tape being made of a flocked cloth comprising a substrate and a flock material formed on said substrate, said flocked cloth having a tensile strength in a longitudinal direction as measured by the method A defined in JIS L 1096-1990 of not less than 25 kgf/50 mm and a tensile elongation of not more than 5%/5 kg/50 m, characterized in that a single yarn of a dissolution-decomposition type composite fiber consisting of a nylon component and a dissolving component is used as said flock material and a thin-fineness filament obtained by splitting said single yarn is used as a pile, and that said pile is formed in pile height within a range from 0.2 to 1.0 mm and pile density within a range from 100 to 200 g/m<sup>2</sup> and 80% or more of said pile is formed in fineness of less than 0.3 d.

09805032 082001

March 23, 2001

1. (Amended) A polishing tape for polishing the surface of a substrate of a magnetic recording medium, said polishing tape being made of a flocked cloth comprising a substrate and a flock material formed on said substrate, said flocked cloth having a tensile strength in a longitudinal direction as measured by the method A defined in JIS L 1096-1990 of not less than 25 kgf/50 mm and a tensile elongation of not more than 5%/5 kg/50 m, characterized in that a single yarn of a dissolution-decomposition type composite fiber consisting of a nylon component and a dissolving component is used as said flock material and a thin-fineness filament obtained by splitting said single yarn is used as a pile, and that said pile is formed in pile height within a range from 0.2 to 1.0 mm and pile density within a range from 100 to 200 g/m<sup>2</sup> and 80% or more of said pile is formed in fineness of less than 0.3 d.

09305032 032001



JC10 Rec'd PCT/PTO 23 MAR 2001

8/PRTS<sup>1</sup>

09/806082

## DESCRIPTION

## POLISHING TAPE

USED IN PRODUCTION OF MAGNETIC RECORDING MEDIUM

TECHNICAL FIELD

The present invention relates to a tape for polishing the surface of a substrate for medium in the step of producing a magnetic recording medium.

BACKGROUND ART

As described in Examined Patent Publication (Kokoku) No. 7-13841 and Unexamined Patent Publication (Kokai) No. 8-96355, a magnetic recording medium obtained by subjecting a substrate made of an aluminum alloy to a non-magnetic plating treatment such as alumite treatment, Ni-P plating or the like, coating with a primary layer of Cr, coating with a magnetic thin film layer of a Co-based alloy, and then coating with a carbonaceous protective film has hitherto been used exclusively as a magnetic recording medium.

Such a magnetic recording medium (magnetic disc) has high dimensional accuracy and is liable to exhibit an enhanced recording density because of its hard substrate. When a magnetic head is contacted with a magnetic disk rotating at high speed, there arises so-called head crushing to break down the magnetic head. To avoid head crushing, the magnetic head

09805082-082001

is employed in the levitation state.

However, with the increase of the density of the magnetic disk, the levitation height of the head decreases more and more and the levitation height of not more than  $1.5 \mu\text{m}$  is recently required. It is the greatest point for improvement in recording density to maintain the levitation height of the head at a very small value, and it is the greatest technical object to prevent head crushing while maintaining a low levitation height.

Studying about the magnetic disk, adsorption sometimes arises between the levitated surface of the magnetic head and the magnetic disk when the disk is at a standstill in case of writing in the magnetic disk or reproduction.

The adsorption phenomenon described above is caused by the fact that, when the levitated surface of the magnetic head and the surface of the magnetic disk are very smooth and face mutually at a microspace, the microspace is filled with molecules such as  $\text{O}_2$ ,  $\text{N}_2$ ,  $\text{H}_2\text{O}$ , etc. and a large adsorptivity is caused by a surface tension. Such the adsorption phenomenon causes such a disadvantage that a large amount of an electric power is consumed on starting of a motor.

To prevent such an adsorption phenomenon, a substrate is textured, that is, the surface of the substrate is once mirror-finished and then the surface is adjusted to a proper surface roughness by roughening before forming a magnetic

05806082 082001

film on the substrate.

As the texturing method, the following method has hitherto been employed. For example, a so-called textured substrate can be obtained by directly transferring a Ni-P plated substrate in a radial direction of the substrate while pressing a polishing tape comprising deposited abrasive grains made of silicon carbide, alumina or diamond from the back surface of the tape by means of a roll in the state where the substrate is rotated, thus forming concentric streaks on the surface of the substrate.

However, it is considerably difficult to roughen the surface of the substrate by adjusting to a proper surface roughness using a conventional polishing tape, thus causing a problem that the surface of the substrate is too roughened.

To solve such a problem, Unexamined Patent Publication (Kokai) No. 6-295432 has suggested that a constituent fiber of a polishing tape used for texturing is made thin as compared with a conventional one and the surface roughness Ra is adjusted to 40 Å or less by using a polishing tape composed of fibers having a diameter of 5 μm (fineness: 0.1 denier).

Also Unexamined Patent Publication (Kokai) No. 8-96355 has suggested a nonwoven fabric wherein a water retaining rate is not less than 400% and a fiber strength is not more than 11 (kg/5 cm width) in 10% modulus strength (longitudinal direction) when drying and, moreover, a difference between

09806082 032001

10% modulus strength (longitudinal direction) when drying and that when wetting is not more than 8 (kg/5 cm width).

The respective polishing tapes described in the publications described above are provided with a characteristic constitution, thereby exerting a peculiar effect. According to a trend for several years ahead (five to six years), fixed abrasive grains have changed gradually into free abrasive grains in a polishing system, whereby a raised tape as a raw tape material has changed into a flocky tape and, moreover, a fabric and a nonwoven fabric as the other raw material change into a raw material with a more soft surface. Therefore, these polishing tapes are exclusively used at preset.

In a conventional polishing system, a tape using an abrasive having a large grain size and a fiber having a large single yarn fineness was satisfactorily employed. However, with the increase of the requirement of information density to the substrate, it has been required to develop a polishing tape using a microfiber having a small single yarn fineness, which can sufficiently retain an abrasive having a very small grain size.

In light of circumstances described above, the present invention has been made and an object thereof is to provide a novel polishing tape which has a polished substrate having a small surface roughness as compared with a conventionally

suggested polishing tape and prevents the occurrence of crushing to the utmost, and is also capable of noticeably improving levitation characteristics of the magnetic head.

#### DISCLOSURE OF THE INVENTION

To attain the abject described above, the present invention is provided with the following constitution. That is, the invention described in claim 1 is directed to a polishing tape for polishing the surface of a substrate of a magnetic recording medium, said polishing tape being made of a flocked cloth comprising a substrate and a flock material formed on said substrate, said flocked cloth having a tensile strength in a longitudinal direction as measured by the method A defined in JIS L 1096-1990 of not less than 25 kgf/50 mm and a tensile elongation of not more than 5%/5 kg/50 m, characterized in that a single yarn of a dissolution-decomposition type composite fiber consisting of a nylon component and a dissolving component is used as said flock material and a thin-fineness filament obtained by splitting said single yarn is used as a pile, and that said pile is formed in pile height within a range from 0.2 to 1.0 mm and 80% or more of said pile is formed in fineness of less than 0.3 d.

The invention described in claim 2 is directed to a polishing tape for polishing the surface of a substrate of a magnetic recording medium, said polishing tape being made

of a fabric, the sum total of a warp cover factor and a weft cover factor of said fabric being within a range from 2,000 to 4,500, characterized in that a multifilament made of nylon or polyester fibers having a single yarn fineness of not more than 5 d is used as a warp and a multifilament, whose constituent single yarn is formed into a dissolution-decomposition type composite fiber consisting of a nylon component and a dissolving component, is used as a weft, and that 80% or more of a thin-fineness filament obtained by splitting a single yarn of said dissolution-decomposition type composite fiber is formed in fineness of less than 0.3 d.

The invention described in claim 3 is directed to a polishing tape for polishing the surface of a substrate of a magnetic recording medium, said polishing tape being made of a nonwoven fabric, characterized in that a thin-fineness filament obtained by splitting a single yarn of a dissolution-decomposition type composite fiber consisting of a nylon component and a dissolving component is used as a web, and that 80% or more of said thin-fineness filament is formed in fineness of less than 0.3 d and fiber length within a range from 20 to 120 mm.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a perspective view showing the whole of the

1980-08-20

service condition of a polishing tape according to the present invention.

Fig. 2 is a side view showing the service condition of a polishing tape according to the present invention.

Fig. 3 shows portion of the manufacturing process of a flocked cloth and is a view for explaining a flocking step.

Fig. 4 shows portion of the manufacturing process of a flocked cloth and is a view for explaining a baking step.

Fig. 5 is a microphotograph showing a pile tip of a conventional flocked cloth.

Fig. 6 is a microphotograph showing a pile tip of a flocked cloth according to the present invention.

#### BEST MODE FOR CARRYING OUT THE INVENTION

The embodiments of the present invention will be described below with reference to the accompanying drawings. First, the service condition of the tape of the present invention will be described by way of a texturing processing with reference to Fig. 1 and Fig. 2.

As shown in both drawings, each of two tapes 4,5 travels in the direction indicated by the arrow B while pressing against each of the surface 2 and the back surface 3 of a substrate 1 rotating positively in the direction indicated by the arrow A by means of each of pressing rolls 6,7 and, at the same time, an abrasive liquid containing free abrasive

09606082, 082001

grains is continuously fed to surfaces to be polished of tapes 4,5 from nozzles 8,9, whereby slurry polishing is carried out.

The respective pressing rolls 6,7 are driven by a cylinder 10 for pressurizing a roll, and press the respective tapes 4,5 against the surface 2 and the back surface 3 at a predetermined pressure. Although the tapes 4,5 continuously travel in the direction indicated by the arrow B, a new tape is always fed to both surfaces 2,3 of the substrate 1 in the state of being contacted under pressure during traveling of the tapes, whereby the surface 2 and the back surface 3 are polished.

Also the tapes 4,5 reciprocate (vibrate) in the direction indicated by the arrow C by a reciprocating motion of the pressing rolls 6,7 and streaks are formed on both surfaces of the substrate 1 by this movement and rotation of the substrate 1 itself, thereby forming the textured substrate 1.

Since the tape of the present invention is used while maintaining a fixed tensile elongation under a high tension, as described above, a raw material thereof is preferably a fiber structure capable of attaining a tensile strength in a longitudinal direction as measured by the method A defined in JIS L 1096-1990 of not less than 25 kgf/50 mm and a tensile elongation of not more than 5%/5 kg/50 m.

Specific textures of such a fiber structure are textures



such as flocked cloth obtained by fixing predetermined piles on a substrate coated with an adhesive by means of high-pressure static electricity, conventional fabric of a stain, nonwoven fabric obtained by appropriately accumulating and fixing webs and the like.

Regarding the flocked cloth, fabric and nonwoven fabric, which constitute the tape of the present invention, a thin-fineness filament obtained by splitting a single yarn of a dissolution-decomposition type composite yarn containing nylon 6 or nylon 66 as a major constituent fiber is used and 80% or more of the thin-fineness filament is formed in fineness of less than 0.3 d.

The thin-fineness filament can be obtained easily from a dissolution-decomposition type composite yarn with petal-shaped segments described in Examined Patent Publication (Kokoku) No. 6-21397, a dissolution-decomposition type composite yarn with sea-island type segments described in Examined Patent Publication (Kokoku) No. 62-50594 or the like by splitting a constituent single yarn.

Examined Patent Publication (Kokoku) No. 6-21397 discloses a dissolution-decomposition type composite yarn wherein a fiber forming polymer made of nylon 6 or nylon 66 is split into seven or more segments by a polymer having dissolution properties larger than those of the fiber-forming

09806082-082001

polymer and one of the segments is a core segment having a fineness of not less than 1.2 d arranged at almost the center of a transverse section of the fiber, while other segments are six or more petal-shaped filaments having a fineness of not more than 0.5 d arranged around the core segment. The thin-fineness filament used in the present invention can be obtained at a predetermined fineness and a predetermined proportion by forming a composite yarn having such a single yarn structure at a predetermined fineness and dissolving to remove a polymer having large dissolution properties before and after the knitting process.

Examined Patent Publication (Kokoku) No. 62-50594 describes a dissolution-composition type composite yarn (single yarn) consisting of a sea component polymer having large dissolution properties and decomposition properties to chemicals and an island component polymer wherein values of these physical properties are comparatively low. The other example of the thin-fineness filament used in the present invention can be obtained by forming the island component with nylon 6 or nylon 66 and completely dissolving only the sea component polymer without dissolving to remove the island component polymer.

In the present invention, the thin-fineness filament obtained by such a process is used as flock materials of the flocked cloth, warps of the fabric, and webs of the nonwoven

09306082, 052001

fabric. Specific embodiments of the respective tapes made of the above materials will be described separately, though a predetermined fineness varies.

The polishing tape made of the flocked cloth can be produced by either a known continuous flocking apparatus of DOWN system or a known continuous flocking apparatus of UP system, but the continuous flocking apparatus of UP system utilizing only a suction force of a high-pressure electrostatic field is superior in that piles as the flock material can be fixed more perpendicularly to the adherend surface on needle planting and a high-density product can be obtained. Therefore, it is suited for use in the polishing tape of the present invention.

The flocked cloth of this embodiment is produced through the flocking step shown in Fig. 3, the baking step shown in Fig. 4 and the opening processing step (not shown) in order. In the flocking step, a base cloth 12 unreel from a wound cloth 11 continuously travel in the direction indicated by arrow shown in Fig. 3 and is coated with an adhesive directly under an adhesive tank 13 during traveling. Piles 16 as a flock material are needle-planted by static electricity at a high-pressure electrostatic field 15 immediately under a flock material hopper 14 and fixed on the base fabric, followed by a drying treatment in a drying chamber 17 using a combustion gas at 100°C for four minutes and further a blushing step 18.

09305092-083004  
T00289-2809866

Then, a flocked base cloth 19 is once taken up as a cloth roll 20.

As shown in Fig. 4, the flocked base fabric 19 is coated with an adhesive containing an acrylic acid and a nitrile copolymer emulsion as a principal component and a melamine epoxy crosslinking agent as an auxiliary by an adhesive recoating apparatus 22 arranged in the process of unreeling from the cloth roll 20 and taking up again as a cloth roll 21.

Using the flocked base cloth 19, a polishing tape having a predetermined width of the present invention is produced through the opening processing step where each of acrylic padding, steaming, opening, washing with water, neutralization, dry heat setting and slit processing treatments are conducted in order.

In the respective steps of the flocked cloth, as the flock material of the embodiment according to the present invention, a dissolution-composition type composite yarn consisting of a nylon component and a dissolution component is used after cutting into pieces having a fiber length within a range from 20 to 120 mm (median: 51 mm) in a non-split state.

The dissolution-composition type composite yarn maintains the non-split state in the flocking step and baking step and a pile portion of a flock material protruding from an adhesive layer is split into a thin-fineness filament for

0905083-08204  
FOO280-2290350

the first time by dissolving to remove a polymer having large dissolution properties in the opening processing step, particularly opening process, thus forming a flocked portion. The base portion of the pile portion is embedded in the adhesive layer.

In a conventional flocking processing using a normal flocking technique, it is carried out to make the fiber rigid and upright, provide with good conductivity, and make the surface smooth with the help of flying of piles in the electric field. For these purposes, the flock material is previously subjected to a pre-treatment using a mixed solution of 2-8% of inorganic salts, 0.1-2.0% of a surfactant and an organic silicon. The organic silicon has an effect of satisfactorily separating the fiber.

However, when using such a mixed solution, a very small amount of the mixed solution adheres on the whole pile surface of the final flocked cloth, as shown in Fig. 5, resulting in large defects for polishing tape. To the contrary, according to the embodiment of the present invention, since a constituent single yarn is split by dissolving to remove a polymer component in a dissolution-composition type composite yarn to form a thin-fineness filament, the pile surface is smooth as shown in Fig. 6 and are free from defects described above.

It is necessary that the pile fineness of the flocked

09806082.032001

cloth in the embodiment of the present invention, i.e. fineness of the thin-fineness filament, is not more than 0.5 d and 80% or more of piles have a fineness of less than 0.3 d. When the fineness is not less than 0.3 d, the degree of freedom of piles to be arranged perpendicularly to the surface of the base cloth is insufficient and the softness is poor so that the polished disk surface is likely to take deep scratches. With the reduction of the size of abrasive grains (following generation), these features are essential to uniformly trap them.

In the final product, the height of piles protruding from the surface of the base cloth is properly within a range from 0.2 to 1.0 mm. When the height is less than 0.2 mm, the degree of freedom of the pile tip is impaired to cause scatter in flocking density, thus making it impossible to uniformly maintain abrasive grains. On the other hand, when the height exceeds 1.0 mm, there arises a disadvantage that piles are mutually intersected. The pile density (flocking density) is properly within a range from 100 to 200 g/m<sup>2</sup>.

As the base cloth for flocked cloth, on which piles are directly needle-planted, a twill made of an ester/rayon union yarn has hitherto been used. However, the fabric sometimes causes wrinkles at both selvage portions due to a selvage curling phenomenon of a wound fabric, thereby drastically impair the quality of the product. In this embodiment, the

base fabric is produced by a multifilament made of synthetic fibers and the single yarn of the multifilament is formed of a core-sheath type composite yarn wherein a softening point of a sheath component is 20°C or more lower than that of a core component, thus completely solving the drawback described above.

Using polyethylene terephthalate (melting point: 255°C, softening point: 240 °C ) whose acid component is 100% terephthalic acid, as a core component, and using a polyamide fiber made of nylon 6 or nylon 66 having a softening point, which is 20°C lower than that of polyethylene terephthalate, as a sheath component, such a core-sheath composite fiber is spun at a core-sheath ratio of 1:1, and then resulting multifilament is used as warps and wefts to give a plain weave, a still or a satin, which is used as a base fabric. The flocked cloth of this embodiment is obtained by flocking the pile described above on the base fabric.

The polishing tape made of the fabric according to the present invention will be described below. In the polishing tape, a single yarn having the same structure as that of the dissolution-decomposition type composite yarn used in the flocked cloth is used and a multifilament obtained by bundling a plurality of single yarns is used as a weft. Although the dissolution-decomposition type composite yarn has either a petal-shaped section described in Examined Patent

09306032 DE2001

Publication (Kokai) No. 6-21397 or a sea-island type section described in Examined Patent Publication (Kokai) No. 62-50594, the fineness of the thin-fineness filament obtained by dissolving to remove a polymer having large dissolution properties in the composite yarn is set to 0.5 d or less, and preferably the fineness of 80% or more of the total thin-fineness filaments is set to 0.3 d or less.

As the warp used in combination with such a weft, a straight yarn of a conventional filament made of nylon 6 or nylon 66, which has a single yarn fineness of not more than 5 d, is used, and a false twist yarn thereof is preferably used.

In the fabric consisting of the warp and weft of this embodiment, TCF must be adjusted within a range from 2,000 to 4,500, TCF referring to the sum total of a warp cover factor and a weft cover factor of the fabric.

In the target polishing tape of the present invention, the tensile strength and tensile elongation are preferably maintained at predetermined values as described above while reducing the thickness to the utmost. When TCF exceeds 4,500, the thickness becomes too large, which is not proper. On the other hand, when TCF is less than 2,000, it becomes difficult to produce a fabric having good durability.

As the texture constituting the fabric, either a plain weave, a still or a satin can be used. Since crossover points

09806082 0220 28090860



are desultorily formed on the surface of the resulting fabric and either warps or wefts float lengthwise on the whole of one surface of the fabric to cover the cloth surface and, moreover, crossover points disappear to smooth the surface, a satin, particularly a satin with wefts floating lengthwise is best suited for use in the polishing tape.

The step of decomposing the dissolution-decomposition type composite yarn constituting a weft is carried out in the finishing step which is carried out after forming into a fabric, and a thin-fineness filament is formed by simultaneously performing dissolution to remove a polymer having large dissolution properties and splitting of the constituent single yarn. The polishing tape made of the fabric can be obtained by the embodiment described above.

Furthermore, the embodiments of the polishing tape made of the nonwoven fabric according to the present invention will be described below. In the polishing tape of the present invention, fibers, which have the same structure as that of the dissolution-decomposition type composite yarn used in the flock material of the flocked cloth and wefts of the fabric, are used as webs, and a predetermined nonwoven fabric is formed by cutting a multifilament thereof into short fibers of 51 mm in length, carding the fibers, laminating web layers with a good balance in warp and weft directions in a cross-lay manner, and spraying ultrahigh-pressure water (about 300

09206082 082001

kg/cm<sup>2</sup>) over the laminate, thereby making a group of short fibers to mutually intersect to give a raw fabric for nonwoven fabric, dissolving a polymer having large dissolution properties in the dissolution-decomposition type composite yarn in a post-processing to remove the polymer, followed by splitting and opening processing of the remaining thin-fineness filament made of nylon 6 or nylon 66.

Accordingly, it is necessary that the fineness of thin-fineness filament constituting the nonwoven fabric is adjusted to 0.5 d or less and 80% of the constituent thin-fineness filament is formed in fineness within a range from 0.03 to 0.3 d. The fiber length is preferably within a range from 20 to 120 mm. The tensile strength and tensile elongation of the final polishing tape are preferably predetermined values described above. To obtain the above value of the tensile elongation, it is preferred to form a structure wherein heat-fusing fibers are mixed and mesh sheets made of polypropylene are interposed between the nonwoven fabrics. A film is preferably applied to one surface and, in this case, a film made of polyester or polypropylene having a thickness within a range from about 20 to 50  $\mu$  is preferably bonded. The thickness of the tape is preferably set within a range from 0.3 to 1.0 mm, while the distance between nozzles is preferably set within a range from 0.2 to 3.0 mm.

09806082-082001

Each of the polishing tapes made of the flocked cloth, fabric and nonwoven fabric obtained by the processes shown in the embodiments described above is cut into a continuous tape having a defined width through a finishing process to form a tape winding body, which is then put into practical use as tapes 4,5 shown in Fig. 1 and Fig. 2.

### EXAMPLES

The following Examples further illustrate the present invention in detail.

#### (Example 1)

A drawn yarn of a dissolution-decomposition type composite yarn (100 d/50 f) obtained by a conventional step was cut into pieces of 51 mm in length to form a pile material used in Example A. The dissolution-decomposition type composite yarn had a petal-shaped transverse section, wherein one segment arranged at a center and eight segments arranged around the segment are made of nylon 9 and these segments are integrated with a polymer having dissolution properties larger than those of nylon 6. Nine segments described above had almost the same fineness.

Using, as a weft, a union yarn (20 count, English type count) containing 65% polyester cotton and 35% rayon stable cotton, a 2/1 twill was produced at a warp density of 80/inch and a weft density of 45/inch and the resulting twill was used

100280-28090850

as a base cloth of Example A.

Using the pile material and base cloth, a polishing tape made of a flocked cloth of Example A was produced through the flocking step, baking step and opening processing step shown in Fig. 3 and Fig. 4.

The drawn yarn configuration of the dissolution-splitting type composite yarn was charged to 75 d/50 f from 100 d/50 f and the drawn yarn was flocked by using the same base cloth and step as in Example A to obtain a polishing tape made of a flocked article of Example B.

Using, as a pile material, a nylon fiber consisting of a constituent single yarn of 16  $\mu$ m in diameter obtained from 170DMF (sea-island type composite fiber), the pile material was flocked by using the same base cloth and step as in Example A to obtain a polishing tape made of a flocked article of Comparative Example C.

Major constituent features of three kinds of polishing tape described above as well as results of use as tapes 4,5 in the service aspect shown in Fig. 1 and Fig. 2 are shown in Table 1.

09306032-032001

Table 1

Items		Example A	Example B	Comp. Example A
Constituent features	Pile fiber diameter ( $\mu\text{m}$ )	5	4.3	16
	Pile material	Nylon 6	Nylon 6	Nylon 6
	Pile height (mm)	0.5	0.5	0.5
	Kind of raw fiber yarn (d/f)	100/50 BKR	75/50 BKR	170 DMF
	Flocking density ( $\text{g/m}^2$ )	150	200	100
	Opening processing step	Continuous method	Continuous method	Continuous method
Results of use	Surface roughness of substrate after polishing ( $\text{Ra}$ ) $\text{\AA}$	13.3	11.4	14.5
	Processing speed (nm)	115	104	88

## (Example 2)

Using a false twist yarn of a dissolution-splitting type composite yarn of 100 d/50 f used in Example A as a weft and using a twist yarn of a polyester filament of 75 d/36 f as a warp, a fabric with 8-satin per one surface was produced to obtain a polishing tape made of a fabric of Example C.

Using the same false twist yarn as in Example C as a weft and using a non-twist yarn of a polyester filament of 60 d/48 f as a warp, a fabric with 8-satin per one surface was produced to obtain a polishing tape made of a fabric of Example D.

Using a polyester multifilament having a fineness of about 0.06 d of thin-fineness filaments having a total denier of 100 d and a single yarn fineness of 4 d made of sea-island type composite fibers as a weft and using a polyester

0906087 082001 100280 28090250

multifilament of 75 d/18 f as a warp, a fabric with 5-satin per one surface was produced to obtain a polishing tape made of a fabric of Comparative Example B.

Major constituent features of three kinds of polishing tape described above as well as results of use as tapes 4,5 in the service aspect shown in Fig. 1 and Fig. 2 are shown in Table 2.

0906062-032004

Table 2

Items		Example C	Example D	Comp. Example B
Constituent features	Fabric texture	8-satin per one surface	8-satin per one surface	5-satin per one surface
	Warp polymer	Polyester	Polyester	Polyester
	Processing state of warp	Raw silk 200 T/M	Non-twist yarn of raw silk	Non-twist yarn of raw silk
	Kind of warp (d/f)	75/36	60/48 (high shrink yarn)	75/18
	Warp fiber diameter ( $\mu\text{m}$ )	5	5	3
	Weft polymer	Nylon 6	Nylon 6	Polyester
	Processing state of weft	False twist yarn	False twist yarn	Raw silk
	Kind of weft (d/f)	100/50 BKR	100/50 BKR	140 D-MF
	Number of warps per inch	108	122	137
	Number of wefts per inch	160	168	130
	Cover factor	3,198	3,321	2,724
Results of use	Surface roughness of substrate after polishing (Ra) Å	11.2	10.0	13.7
	Processing speed (nm)	88	100	67

(Example 3)

Using the material used in Example A as a web material for nonwoven fabric of Example E and using the pile material used in Comparative Example A as a web material of Comparative Example C, polishing tapes made of a nonwoven fabric having a tape thickness of 0.6 mm of Example E and Comparative Example C were separately produced through the above manufacturing process of the nonwoven fabric. Major constituent features of two kinds of polishing tape described above as well as results of use as tapes 4,5 in the service aspect shown in

Fig. 1 and Fig. 2 are shown in Table 3.

Table 3

	Items	Example E	Comp. Example C
Constituent features	Web fiber diameter ( $\mu\text{m}$ )	5	16
	Web material	Nylon 6	Nylon 6
	Kind of raw fiber yarn (d/f)	100/50 BKR	170 DMF
	Weight ( $\text{g/m}^2$ )	130	130
Results of use	Surface roughness of substrate after polishing ( $R_a$ ) $\text{\AA}$	15	16
	Processing speed (nm)	70	65

As is apparent from Table 1, Table 2 and Table 3, the polishing tapes of Examples according to the present invention are superior in surface roughness and processing speed to Comparative Examples. As used herein, the term "surface roughness" refers to surface roughness defined in JIS B 1061.

#### INDUSTRIAL APPLICABILITY

According to the polishing tape of the present invention, since the surface to be contacted with a substrate to be polished is formed of a thin-fineness filament made of nylon 6 or nylon 66 having a fineness of not more than 0.5 d, preferably less than 0.3 d, which is obtained by splitting a dissolution-decomposition type composite yarn in any of the flocked cloth, fabric and nonwoven fabric, the polishing tape is superior in compatibility with diamond microparticles as



an abrasive and has an effect of absorbing a grain size balance of fine powders. For example, even in case where fine powders having a large grain size are suddenly incorporated, the substrate does not take large scratches. Particularly, when using the flocked cloth as a fiber structure, since a base material of the present invention is a fabric, this effect becomes further remarkable because the base material itself has an elastic force.

As described in the opening paragraph, with the increase of the requirement of information density to the substrate, the fineness of constituent fibers of the polishing tape must be reduced. In the present invention, the fineness of constituent fibers can be reduced comparatively easily because thin fineness is attained by splitting the dissolution-decomposition type composite yarn. Therefore, the present invention has an advantage capable of sufficiently coping with the requirement of an improvement in information density by the use of a raw yarn having a fineness thinner than that described above (e.g. not more than 0.15 d, and preferably not more than 0.1 d) as well as size reduction of the abrasive (e.g. diamond microparticles, etc.).

09806087-082001

## CLAIMS

1. A polishing tape for polishing the surface of a substrate of a magnetic recording medium, said polishing tape being made of a flocked cloth comprising a substrate and a flock material formed on said substrate, said flocked cloth having a tensile strength in a longitudinal direction as measured by the method A defined in JIS L 1096-1990 of not less than 25 kgf/50 mm and a tensile elongation of not more than 5%/5 kg/50 m, characterized in that a single yarn of a dissolution-decomposition type composite fiber consisting of a nylon component and a dissolving component is used as said flock material and a thin-fineness filament obtained by splitting said single yarn is used as a pile, and that said pile is formed in pile height within a range from 0.2 to 1.0 mm and 80% or more of said pile is formed in fineness of less than 0.3 d.

2. A polishing tape for polishing the surface of a substrate of a magnetic recording medium, said polishing tape being made of a fabric, the sum total of a warp cover factor and a weft cover factor of said fabric being within a range from 2,000 to 4,500, characterized in that a multifilament made of nylon or polyester fibers having a single yarn fineness of not more than 5 d is used as a warp and a multifilament, whose constituent single yarn is formed into a dissolution-decomposition type composite fiber consisting of

T.00290.29090860

a nylon component and a dissolving component, is used as a weft, and that 80% or more of a thin-fineness filament obtained by splitting a single yarn of said dissolution-decomposition type composite fiber is formed in fineness of less than 0.3 d.

3. A polishing tape for polishing the surface of a substrate of a magnetic recording medium, said polishing tape being made of a nonwoven fabric, characterized in that a thin-fineness filament obtained by splitting a single yarn of a dissolution-decomposition type composite fiber consisting of a nylon component and a dissolving component is used as a web, and that 80% or more of said thin-fineness filament is formed in fineness of less than 0.3 d and fiber length within a range from 20 to 120 mm.


09305033-082004

## ABSTRACT

Disclosed is a tape for polishing the surface of a substrate of a magnetic recording medium, and a thin-fineness filament obtained by dissolving a dissolving component of a dissolution-decomposition type composite yarn consisting of a nylon component and the dissolving component is used as piles of a flocked cloth, warps of a fabric, and webs of a nonwoven fabric.

The polishing tape of the present invention can noticeably improve the surface roughness of the polished substrate.

09805082-032004

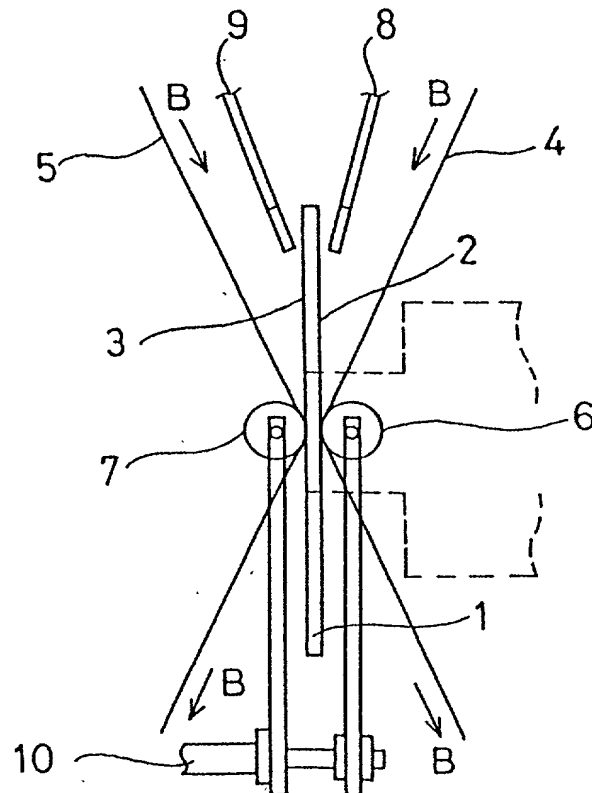

2/3

Fig.3


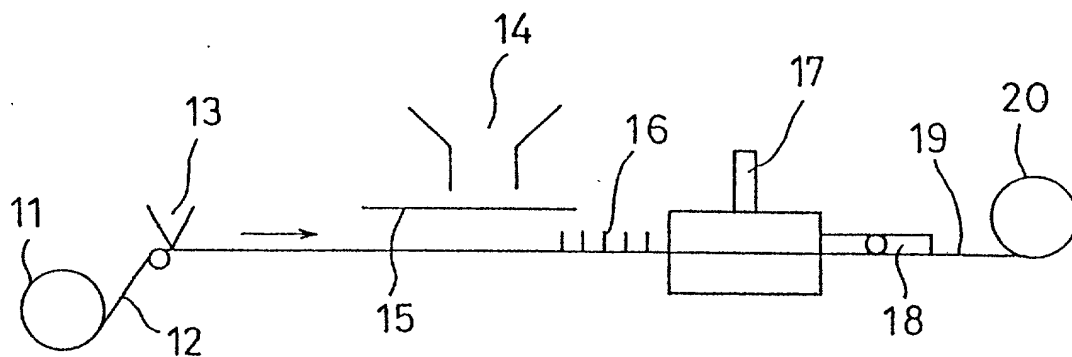


Fig.4

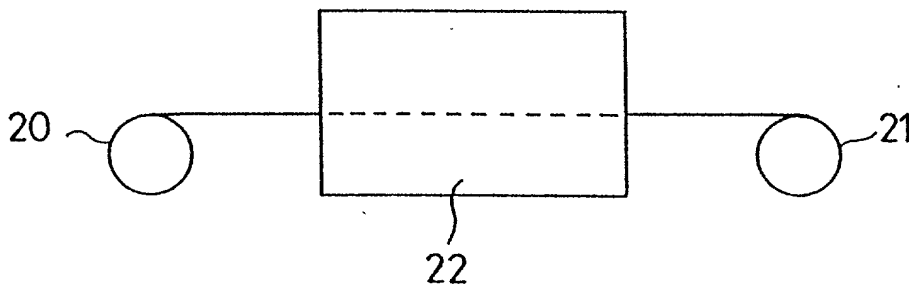

3/3

Fig.5


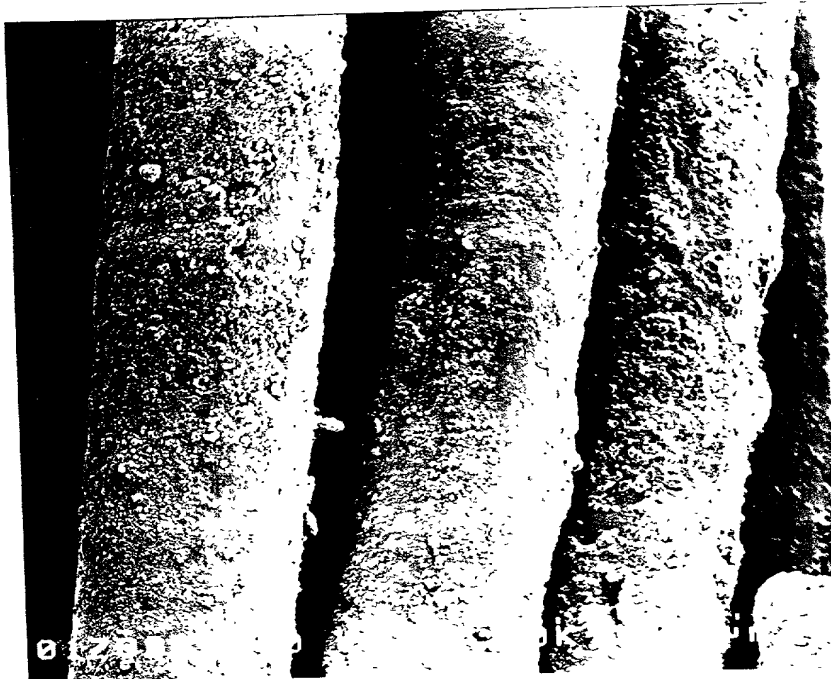


Fig.6

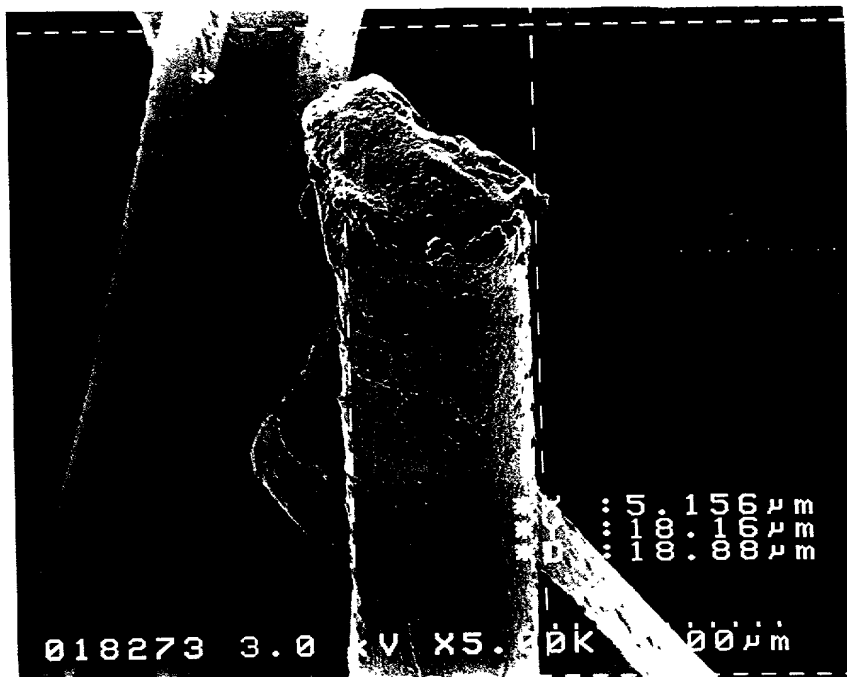

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

## Japanese Language Declaration (日本語宣言書)

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米国外の国の少なくとも一カ国を指定している特許協力条約365(a)項に基づく国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

### Prior Foreign Application(s)

外国での先行出願

<u>10-294609</u>	<u>Japan</u>
(Number)	(Country)
(番号)	(国名)
<u>                    </u>	<u>                    </u>
(Number)	(Country)
(番号)	(国名)

私は、第35編米国法典119条(e)項に基づいて下記の米国外特許出願規定に記載された権利をここに主張いたします。

<u>                    </u>	<u>                    </u>
(Application No.)	(Filing Date)
(出願番号)	(出願日)

私は、下記の米国法典第35編120条に基づいて下記の米国外特許出願に記載された権利、又は米国を指定している特許協力条約365条(c)に基づき権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国外特許出願に開示されていない限り、その先行米国出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日まで期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

<u>                    </u>	<u>                    </u>
(Application No.)	(Filing Date)
(出願番号)	(出願日)
<u>                    </u>	<u>                    </u>
(Application No.)	(Filing Date)
(出願番号)	(出願日)

私は、私自身の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じていることに基づき表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の声明を行なえば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Priority Not Claimed

優先権主張なし

<u>September 30, 1998</u>
(Day/Month/Year Filed)
(出願年月日)
<u>                    </u>
(Day/Month/Year Filed)
(出願年月日)

☐

☐

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

<u>                    </u>	<u>                    </u>
(Application No.)	(Filing Date)
(出願番号)	(出願日)

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application.

<u>                    </u>
(Status: Patented, Pending, Abandoned)
(現況: 特許許可済、係属中、放棄済)
<u>                    </u>
(Status: Patented, Pending, Abandoned)
(現況: 特許許可済、係属中、放棄済)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.



## Declaration and Power of Attorney For Patent Application

## 特許出願宣言書及び委任状

## Japanese Language Declaration

## 日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者である（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

POLISHING TAPE USED IN PRODUCTION

OF MAGNETIC RECORDING MEDIUM

上記発明の明細書（下記の欄でx印がついていない場合は、本書に添付）は、

the specification of which is attached hereto unless the following box is checked:

\_\_月\_\_日に提出され、米国出願番号または特許協定条約国際出願番号を\_\_\_\_とし、  
(該当する場合) \_\_\_\_\_ に訂正されました。

☒ was filed on September 30, 1999  
as United States Application Number or  
PCT International Application Number  
PCT/JP99/05434 and was amended on  
\_\_\_\_\_ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定義されたとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

**Japanese Language Declaration**  
(日本語宣言書)

委任状: 私は下記の発明者として、本出願に関する一切の手続きを米特許商標局に対して遂行する弁理士または代理人として、下記の者を指名いたします。(弁理士、または代理人の氏名及び登録番号を明記のこと)

Dale H. Thiel, Reg. No. 24 323  
David G. Boutell, Reg. No. 25 072  
Ronald J. Tanis, Reg. No. 22 724  
Terryence F. Chapman, Reg. No. 32 549  
Mark L. Maki, Reg. NO. 36 589

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith (list name and registration number)

David S. Goldenberg, Reg. No. 31 257  
Sidney B. Williams, Jr., Reg. No. 24 949  
Liane L. Churney, Reg. No. 40 694  
Brian R. Tumm, Reg. No. 36 328

書類送付先

Send Correspondence to:

FLYNN, THIEL, BOUTELL & TANIS, P.C.  
2026 Rambling Road  
Kalamazoo, Michigan 49008-1699

直接電話連絡先: (名前及び電話番号)

Direct Telephone Calls to: (name and telephone number)

Terryence F. Chapman  
(616) 381-1156

唯一または第一発明者名

Full name of sole or first inventor

Akira EBIHARA

発明者の署名

日付

Inventor's signature

Date

Residence

Osaka-shi, Osaka, Japan

国籍

Citizenship

Japan

私書箱

Post Office Address

11-2-702, Furuichi 3-chome, Jyoto-ku,

Osaka-shi, Osaka, Japan

第二共同発明者

Full name of second joint inventor, if any

Shoichiro NOGUCHI

第二共同発明者

日付

Second inventor's signature

Date

Residence

Soraku-gun, Kyoto, Japan

国籍

Citizenship

Japan

私書箱

Post Office Address

2-2-1-Takanohara urban H-302,

Kabutodai, Kizu-cho,

Soraku-gun, Kyoto, Japan

(第三以降の共同発明者についても同様に記載し、署名をすること)

(Supply similar information and signature for third and subsequent joint inventors.)

[X] Additional inventors are being named on the one supplemental additional inventor(s) sheet.

第三の共同発明者の氏名 (該当する場合)		Full name of third joint inventor(if any) Keiji NAKANISHI	
第三共同発明者の署名	日付	Third joint inventor's signature <i>K. Nakanishi</i>	Date April. 4, 2001
住所	Residence Sanda-shi, Hyogo, Japan		
国籍	Citizenship Japan		
郵便の宛先	Post Office Address 2-Centralhills G-1002, Mukogaoka 5-chome, Sanda-shi, Hyogo, Japan		
第四の共同発明者の氏名 (該当する場合)		Full name of fourth joint inventor(if any)	
第四共同発明者の署名	日付	Fourth joint inventor's signature	Date
住所	Residence		
国籍	Citizenship		
郵便の宛先	Post Office Address		
第五の共同発明者の氏名 (該当する場合)		Full name of fifth joint inventor(if any)	
第五共同発明者の署名	日付	Fifth joint inventor's signature	Date
住所	Residence		
国籍	Citizenship		
郵便の宛先	Post Office Address		
第六の共同発明者の氏名 (該当する場合)		Full name of sixth joint inventor(if any)	
第六共同発明者の署名	日付	Sixth joint inventor's signature	Date
住所	Residence		
国籍	Citizenship		
郵便の宛先	Post Office Address		

[X] This Declaration ends with this page.